



Louvre Light T8 Fluorescent


High quality steel painted by UV-proof poewder body with color white,highly polished aluminum parabolic louver.IP20 for degree of protection.

220V-240V/50Hz of rated voatage.Option for materials of reflector.Option for I type grid or V type grid .Electronic/magnetic ballast,possibility of installation emergency electro inventer,or dimmable ballast.


IP20



■ LV-420H
LV-440H



■ LV-420M
LV-440M



Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)	D (mm)	Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)
io-204006	LV-420H	4×20W	600×600	595×595×80	610	io-204008	LV-420M	4×20W	600×620	600×620×80
io-204007	LV-440H	4×40W	600×1200	595×1195×80	1220	io-204009	LV-440M	4×40W	600×1230	600×1230×80

Louvre Light T5 Fluorescent



High quality steel painted by UV-proof poewder body with color white,highly polished aluminum parabolic louver.IP20 for degree of protection.

220V-240V/50Hz of rated voatage.Option for materials of reflector.Option for I type grid or V type grid .Electronic/magnetic ballast,possibility of installation emergency electro inventer,or dimmable ballast.

IP20



■ LV-414H
LV-428H

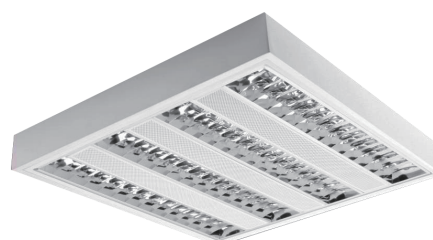

■ LV-414M
LV-428M



Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)	Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)
io-204010	LV-414H	4×14W	600×600	595×595×52	io-204012	LV-414M	4×14W	600×600	595×595×60
io-204011	LV-428H	4×28W	600×1500	595×1195×52	io-204013	LV-428M	4×28W	600×1200	595×1195×60